

# MULTIVERT® 1600A

Size 4a, 690VAC

## IEC FUSE SWITCH DISCONNECTORS

### NH VERTICAL FUSE SWITCH DISCONNECTOR



MULTIVERT® NH vertical fuse switch disconnectors meet all functions of NH fuse switch disconnectors. They are designed for installation on to bus bars in triple pole arrangements.

MULTIVERT® 1250A are for installation on to 185mm bus bar systems.

MULTIVERT® 1250A are designed for NH fuse-links in accordance with IEC/EN 60269-2, VDE 0636-2, size 4a: 1250A.

MULTIVERT® offer the user the possibility of fast and easy installation as well as a high degree of protection during installation and maintenance.

## TECHNICAL DATA OVERVIEW

Voltage AC	690 VAC
Amper (A)	1600 A
Size per Standard	4a
SCCR	Ue = AC 400 V; Ie = 1600 A 31,5kA
Mounting	bus bar system 185 mm
Switchability	3 x single pole
Number of Poles	3

## FEATURES & BENEFITS

- Installation on to 185mm bus bar system
- Top or bottom cable terminal connection
- Safe on load connection/disconnection in accordance with IEC 60947-3

## APPLICATIONS

- Switch boards for industrial applications
- Residential and industrial distribution units
- Cable distribution cabinets

## STANDARDS

- IEC/EN 60 947-3  
For NH-fuse links size 4a in accordance with IEC/EN 60 269-2, VDE 0636-2



MERSEN reserves the right to change, update or correct, without notice, any information contained in this datasheet.

# MULTIVERT® 1600A

Size 4a, 690VAC

## PRODUCT RANGE



1.000.095 1.000.096

### MULTIVERT® 1600 A size 4a 3 x single pole switching

Catalog number	Reference number	Cable termination components	Design	Weight kg <sup>1</sup>	Package
1.000.095	C1023272	2xM12 screw terminal	bottom terminal	16.50	1 piece
1.000.096	D1023273	2xM12 screw terminal	top terminal	16.50	1 piece

<sup>1</sup>weight in kg per piece or set including package

## TECHNICAL DATA IN ACCORDANCE WITH EN / IEC 60947

	<b>1600 A 3 x single pole switching</b>
Number of poles/phases	3
Size	4a
Conventional free air thermal current with NH-fuse links I <sub>th</sub>	1600 A
Max. power dissipation of fuse links P <sub>n</sub>	140 W
Conventional free air thermal current with solid links I <sub>th</sub>	1600 A
Max. power dissipation of solid links P <sub>n</sub>	42 W
Utilization category to IEC/EN 60947-3 U <sub>e</sub> = AC 400 V; I <sub>e</sub> = 1600 A	AC 21 B
Rated operational voltage U <sub>e</sub>	690 V
Rated insulation voltage U <sub>i</sub>	1000 V
Rated impulse withstand voltage U <sub>imp</sub>	8 kV
Rated frequency	50 ... 60 Hz
Degree of protection	IP 20
Degree of pollution	3
Rated duty	uninterrupted duty
Rated conditional short-circuit current with fuse links U <sub>e</sub> = AC 400 V; I <sub>e</sub> = 1600 A	31.5 kA
Rated short circuit making capacity with solid links I <sub>cm</sub>	68 kAsw
Rated short-time withstand current I <sub>cw</sub>	32 kA / 1 s
Power dissipation by I <sub>th</sub> without NH-fuse links	568 W
Power dissipation by I <sub>th</sub> 1000 A without solid links	568 W
Installation mode	bus bar installation
<b>Cable terminal connection</b>	
Standard cable terminal	2 x M12
for copper bars with max. dimensions	80 x 10 mm


MERSEN reserves the right to change, update or correct, without notice, any information contained in this datasheet.

# MULTIVERT® 1600A

Size 4a, 690VAC

## DIMENSIONS


### MULTIVERT® NH-vertical fuse switch disconnecter 1600A (M02004)

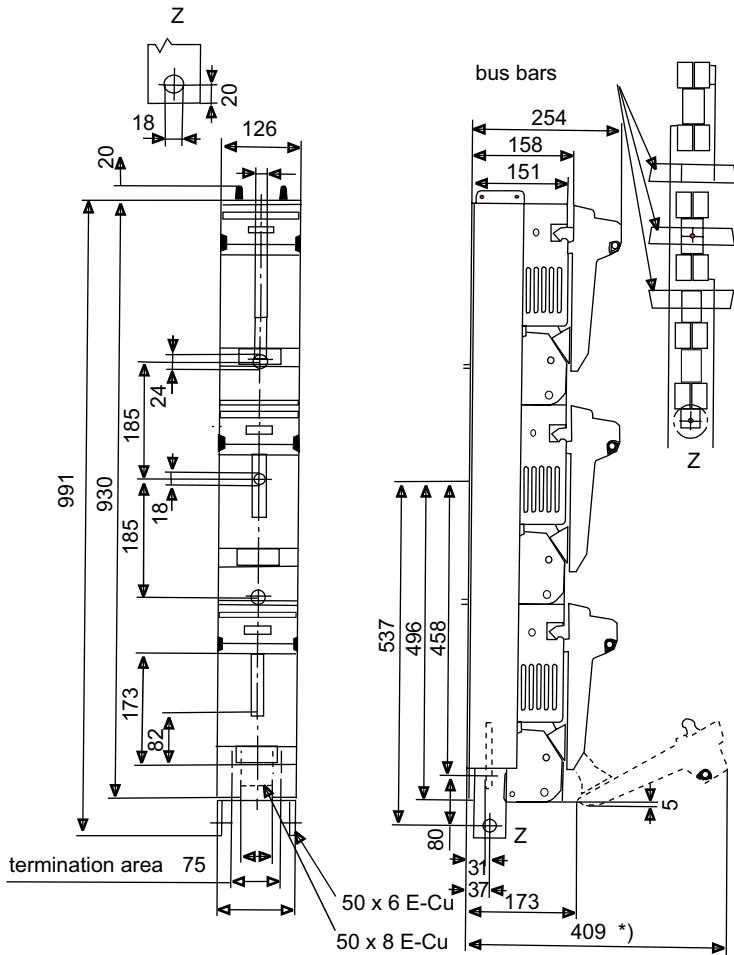

\*) to remove switch door cover 425 mm are required

Dimensions in mm

### Cable termination MULTIVERT® 1600A (M02040\_1600)



Dimensions in mm

MERSEN reserves the right to change, update or correct, without notice, any information contained in this datasheet.