


PRODUCT-DETAILS

AF09Z-30-01-30

AF09Z-30-01-30 24VDC Contactor

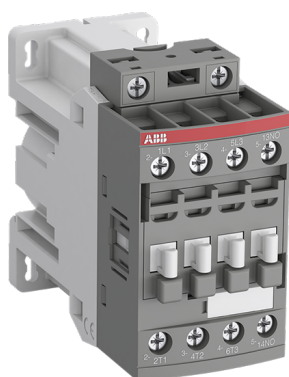

General Information

Extended Product Type	AF09Z-30-01-30
Product ID	1SBL136001R3001
EAN	3471523113398
Catalog Description	AF09Z-30-01-30 24VDC Contactor

Long Description	<p>AF09Z 3-pole contactors are used for controlling power circuits up to 690 V AC and 220 V DC. They are mainly used for controlling 3-phase motors, non-inductive or slightly inductive loads. AF09Z contactors with coil 30 include a 24 V DC electronic coil interface with a built-in surge suppression, obtaining a reduced holding coil consumption up to 1.7 W for a low panel energy consumption and a direct control by PLC-output ≥ 250 mA 24 V DC, without need of additional interface relay. Only AF..Z...-30 contactors need to respect the polarity on the coil terminals (A1+ and A2-). The AF... series 1-stack 3-pole contactors are of the block type design. - Main poles and auxiliary contact blocks: 3 main poles, 1 built-in auxiliary contact, front and side-mounted add-on auxiliary contact blocks. (mechanically-linked auxiliary contacts compliant with Annex L of IEC 60947-5-1. N.C. mirror contacts compliant with Annex F of IEC 60947-4-1) - Accessories: a wide range of accessories is available.</p>
------------------	---

Classifications

Object Classification Code	Q
ETIM 4	EC000066 - Magnet contactor, AC-switching
ETIM 5	EC000066 - Magnet contactor, AC-switching
ETIM 6	EC000066 - Power contactor, AC switching
ETIM 7	EC000066 - Power contactor, AC switching

UNSPSC

39121529

Container Information

Package Level 1 Units	box 1 piece
Package Level 1 Width	96 mm
Package Level 1 Depth / Length	112 mm
Package Level 1 Height	50 mm
Package Level 1 Gross Weight	0.475 kg
Package Level 1 EAN	3471523113398
Package Level 2 Units	crate 12 piece
Package Level 2 Width	51 mm
Package Level 2 Depth / Length	98 mm
Package Level 2 Height	114 mm
Package Level 2 Gross Weight	5.7 kg
Package Level 3 Units	576 piece

Certificates and Declarations (Document Number)

CB Certificate	CB_SE-96551
CCC Certificate	CCC_2010010304445624
cUL Certificate	UL_20180227_E312527_7_1
Declaration of Conformity - CE	1SBD250000U1000
DNV Certificate	DNV-GL_TAE00001AF-3
DNV GL Certificate	DNV-GL_TAE00001AF-3
EAC Certificate	EAC_RU_FRME77B03447
GL Certificate	DNV-GL_TAE00001AF-3
Instructions and Manuals	1SBC101053M6801
RINA Certificate	RINA_ELE240318XG
RMRS Certificate	RMRS_1802705280
RoHS Information	1SBD250000U1000

Technical UL/CSA

General Use Rating UL/CSA	(600 V AC) 25 A
Horsepower Rating UL/CSA	(220 ... 240 V AC) Three Phase 2 hp (440 ... 480 V AC) Three Phase 5 hp (550 ... 600 V AC) Three Phase 7-1/2 hp (120 V AC) Single Phase 3/4 hp (200 ... 208 V AC) Three Phase 2 hp (240 V AC) Single Phase 1-1/2 hp

Environmental

Ambient Air Temperature

Close to Contactor for Storage -60 ... +80 °C

Close to Contactor without Thermal O/L Relay -40 ... +70 °C
 Close to Contactor Fitted with Thermal O/L Relay -25 ... +60 °C

Climatic Withstand	Category B according to IEC 60947-1 Annex Q
Maximum Operating Altitude Permissible	3000 m
Resistance to Vibrations acc. to IEC 60068-2-6	5 ... 300 Hz 4 g closed position / 2 g open position
RoHS Status	Following EU Directive 2011/65/EU

Technical

Number of Main Contacts NO	3
Number of Main Contacts NC	0
Number of Auxiliary Contacts NO	0
Number of Auxiliary Contacts NC	1
Rated Operational Voltage	Auxiliary Circuit 690 V
Rated Frequency (f)	Auxiliary Circuit 50 / 60 Hz Main Circuit 50 / 60 Hz
Conventional Free-air Thermal Current (I_{th})	acc. to IEC 60947-5-1, $q = 40$ °C 16 A acc. to IEC 60947-4-1, Open Contactors $q = 40$ °C 35 A
Rated Operational Current AC-1 (I_e)	(690 V) 40 °C 25 A (690 V) 60 °C 25 A (690 V) 70 °C 22 A
Rated Operational Current AC-3 (I_e)	(220 / 230 / 240 V) 60 °C 9 A (380 / 400 V) 60 °C 9 A (415 V) 60 °C 9 A (440 V) 60 °C 9 A (500 V) 60 °C 9.5 A (690 V) 60 °C 7 A
Rated Operational Power AC-3 (P_e)	(220 / 230 / 240 V) 2.2 kW (380 / 400 V) 4 kW (415 V) 4 kW (440 V) 4 kW (500 V) 5.5 kW (690 V) 5.5 kW
Rated Operational Current AC-15 (I_e)	(220 / 240 V) 4 A (24 / 127 V) 6 A (500 V) 2 A (690 V) 2 A (400 / 440 V) 3 A
Rated Short-time Withstand Current (I_{cw})	at 40 °C Ambient Temp, in Free Air, from a Cold State 10 s 150 A at 40 °C Ambient Temp, in Free Air, from a Cold State 15 min 35 A at 40 °C Ambient Temp, in Free Air, from a Cold State 1 min 60 A at 40 °C Ambient Temp, in Free Air, from a Cold State 1 s 300 A at 40 °C Ambient Temp, in Free Air, from a Cold State 30 s 80 A for 0.1 s 140 A for 1 s 100 A
Maximum Breaking Capacity	$\cos \phi = 0.45$ ($\cos \phi = 0.35$ for $I_e > 100$ A) at 440 V 250 A $\cos \phi = 0.45$ ($\cos \phi = 0.35$ for $I_e > 100$ A) at 690 V 106 A
Maximum Electrical Switching Frequency	AC-1 600 cycles per hour AC-2 / AC-4 300 cycles per hour AC-3 1200 cycles per hour AC-15 1200 cycles per hour DC-13 900 cycles per hour
Rated Operational Current DC-13 (I_e)	(125 V) 0.55 A / 69 W (24 V) 6 A / 144 W

	(250 V) 0.27 A / 68 W (48 V) 2.8 A / 134 W (72 V) 1 A / 72 W (110 V) 0.55 A / 60 W (220 V) 0.27 A / 60 W (400 V) 0.15 A / 60 W (500 V) 0.13 A / 65 W (600 V) 0.1 A / 60 W
Rated Insulation Voltage (U _i)	acc. to UL/CSA 600 V acc. to IEC 60947-4-1 and VDE 0110 (Gr. C) 690 V
Rated Impulse Withstand Voltage (U _{imp})	6 kV
Maximum Mechanical Switching Frequency	3600 cycles per hour
Rated Control Circuit Voltage (U _c)	50 Hz / 60 Hz 100 ... 250 V DC Operation 24 V
Operate Time	Between Coil De-energization and NC Contact Closing 22 ... 57 ms Between Coil De-energization and NO Contact Opening 17 ... 29 ms Between Coil Energization and NC Contact Opening 20 ... 35 ms Between Coil Energization and NO Contact Closing 27 ... 53 ms
Connecting Capacity Main Circuit	Rigid 1/2x 1 ... 6 m ² Flexible with Ferrule 1/2x 0.75 ... 6 m ² Flexible with Insulated Ferrule 1x 0.75 ... 4 m ² Flexible with Insulated Ferrule 2x 0.75 ... 2.5 m ²
Connecting Capacity Auxiliary Circuit	Flexible with Ferrule 1/2x 0.75 ... 2.5 mm ² Flexible with Insulated Ferrule 2x 0.75 ... 1.5 mm ² Flexible with Insulated Ferrule 1x 0.75 ... 2.5 mm ² Rigid 1/2x 1 ... 2.5 m ²
Connecting Capacity Control Circuit	Flexible with Ferrule 1/2x 0.75 ... 2.5 mm ² Flexible with Insulated Ferrule 1x 0.75 ... 2.5 mm ² Flexible with Insulated Ferrule 2x 0.75 ... 1.5 mm ² Rigid 1/2x 1 ... 2.5 m ²
Wire Stripping Length	Auxiliary Circuit 10 mm Control Circuit 10 mm Main Circuit 10 mm
Degree of Protection	acc. to IEC 60529, IEC 60947-1, EN 60529 Auxiliary Terminals IP20 acc. to IEC 60529, IEC 60947-1, EN 60529 Coil Terminals IP20 acc. to IEC 60529, IEC 60947-1, EN 60529 Main Terminals IP20
Terminal Type	Screw Terminals

Dimensions

Product Net Width	45 mm
Product Net Depth / Length	97 mm
Product Net Height	86 mm
Product Net Weight	0.43 kg

Popular Downloads

Instructions and Manuals	1SBC101053M6801
--------------------------	-----------------

Ordering

Minimum Order Quantity	1 piece
Customs Tariff Number	85364900

Categories

Low Voltage Products and Systems → Control Products → Contactors → Block Contactors

