

Start Waterproof

Start Waterproof PC 2 x 58W EB

0045405



Caractéristiques de la gamme

- Available in 1 and 2 lamp options
- Available in 18W, 36W and 58W
- Vandal and heat resistant robust polycarbonate body
- High protection class: IP65
- Injection moulded polycarbonate UV stabilised 850° diffuser IK08 (for PC) IK03 (for Acrylic)
- Stainless steel clips
- Surface mounting brackets supplied
- UV Resistant Polycarbonate
- Retained diffuser for easy maintenance
- RAPID versions available with 840 tubes, 3 pole connectors and through wiring



APERÇU DU PRODUIT

Numéro de commande	0045405
Code EAN	5410288454054
Montage	Ceiling surface
Corps	Polycarbonate
Tension (V)	230
Lampes	2 x 58W T26 G13
Couleur	Grey
Indice de protection IP	65
Indice de protection IK	8

Start Waterproof

Start Waterproof PC 2 x 58W EB

0045405

TABLE DE DONNÉES

Données générales

Numéro de commande	0045405
Code EAN	5410288454054
Montage	Ceiling surface
Longue description	Available in 1 and 2 lamp options. Available in 18W, 36W and 58W. Vandal and heat resistant robust polycarbonate body. High protection class: IP65. Injection moulded polycarbonate UV stabilised 850° diffuser IK08 (for PC) IK03 (for Acrylic). Stainless steel clips. Surface mounting brackets supplied. UV Resistant Polycarbonate. Retained diffuser for easy maintenance. RAPID versions available with 840 tubes, 3 pole connectors and through wiring
Nom du produit	Start Waterproof PC 2 x 58W EB
Disponibilité de l'appareillage	Included
Montage de l'appareillage	Integral
Type d'appareillage	Electronic
Environnement	Under Canopy
Application générale	Car parks, Industrial, Storage Areas
Corps	Polycarbonate
Environnement spécial	Waterproof
Quantité par emballage	1

Données optiques

Type de distribution	Direct - Symmetric
-----------------------------	--------------------

Données électriques

Tension (V)	230
Protection électrique	Class I
Test du fil incandescent	850° C
Lampes	2 x 58W T26 G13
Nombre de lampes total	2

Start Waterproof

Start Waterproof PC 2 x 58W EB

0045405

Données physiques


Poids (kg)	2.55
Couleur	Grey
Lampe incluse	No
Largeur (mm)	91
Longueur (mm)	1565
Indice de protection IP	65
Indice de protection IK	8
Finition du diffuseur	Prismatic
Matériau du diffuseur	Polycarbonate
Secours	Without
Single package dimensions (L x W x H) (cm)	157.50 x 12.80 x 6.00
Outer package dimensions (L x W x H) (cm)	157.50 x 12.80 x 6.00

Start Waterproof

Start Waterproof PC 2 x 58W EB

0045405


PHOTOMÉTRIE

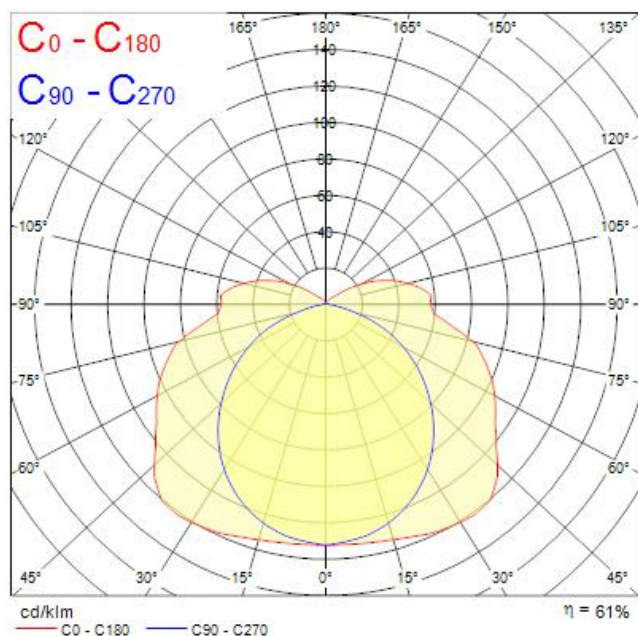

SCHÉMAS TECHNIQUES

Dimensions (mm) Weight (Kg)

Lamp T8	L	W	H	F	Kg
1 x 18W	662	83	91	390	0.9
1 x 36W	1265	83	91	855	1.5
1 x 58W	1565	83	91	955	1.8
2 x 18W	662	123	91	390	1.2
2 x 36W	1265	123	91	855	2.0
2 x 58W	1565	123	91	955	2.4

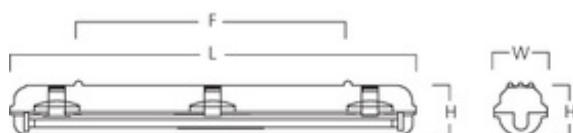

CLASSE ÉNERGÉTIQUE

Start Waterproof

Start Waterproof PC 2 x 58W EB

0045405

