

COUDE 45 ° P31 FBP H75 100 à 500
 Perforated Flat bend 45 ° P31 100x75 to 500


GC
 HDG



CABLE
 MANAGEMENT

FT0760-3

11 13

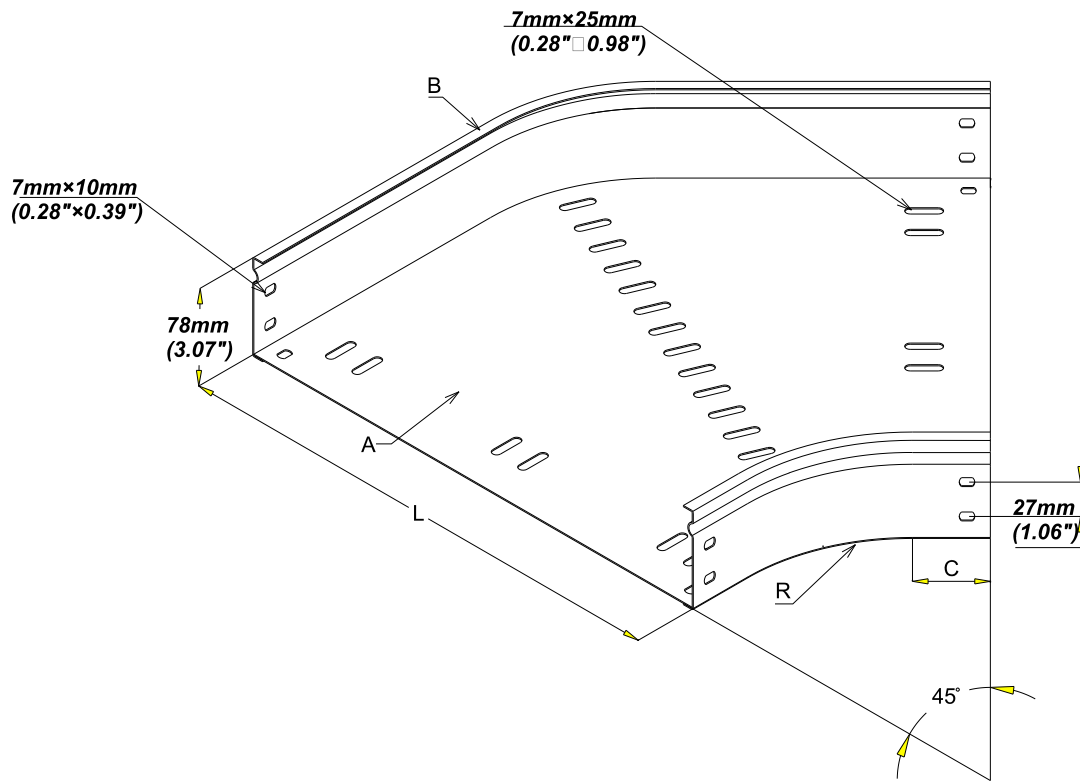

REF	CODE	L /L (mm) (inch)	A /A (mm) (inch)	B /B (mm) (inch)	C /C (mm) (inch)	R /R (mm) (inch)
P31 FBP45 75x100	343 266	100 (3.94")	0.8 (0.032")	0.95 (0.037")	30 (1.18")	100 (3.94")
P31 FBP45 75x150	343 267	150 (5.91")	0.8 (0.032")	0.95 (0.037")	30 (1.18")	100 (3.94")
P31 FBP45 75x200	343 268	200 (7.87")	0.8 (0.032")	0.95 (0.037")	30 (1.18")	100 (3.94")
P31 FBP45 75x300	343 269	300 (11.81")	1 (0.039")	0.95 (0.037")	30 (1.18")	100 (3.94")
P31 FBP45 75x400	343 270	400 (15.75")	1 (0.039")	0.95 (0.037")	50 (1.97")	150 (5.91")
P31 FBP45 75x500	343 271	500 (19.69")	1 (0.039")	0.95 (0.037")	50 (1.97")	150 (5.91")

NORMES/STANDARD

MATIERE / MATERIAL
 S 235 JR

EN 10 025-2

PROTECTION / COATING
 GC/HDG

Class 6 according
 to CEI 61537