

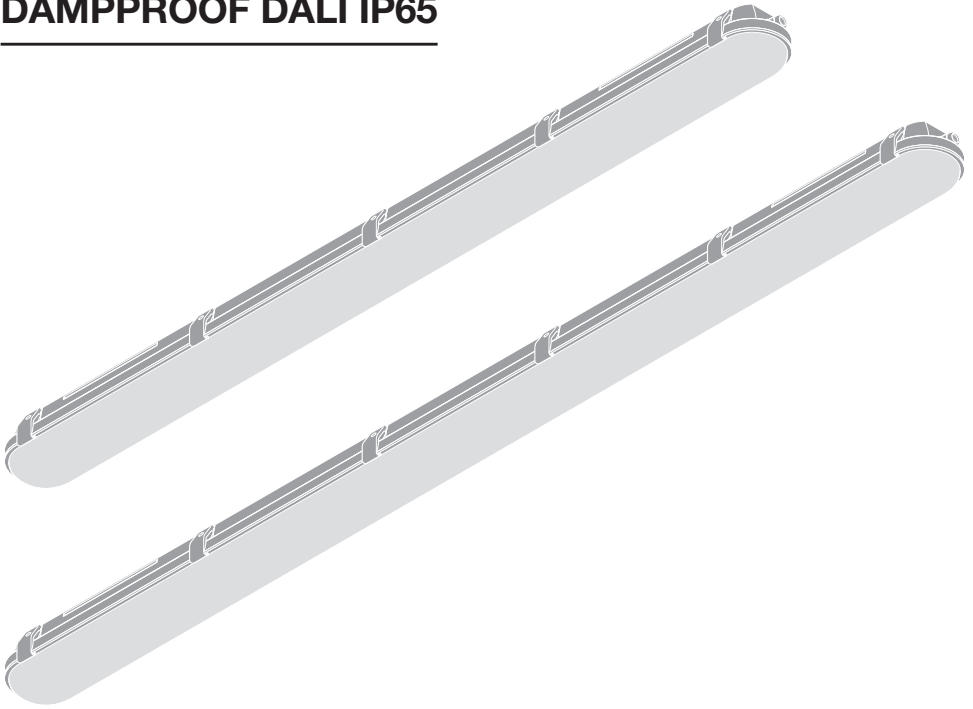
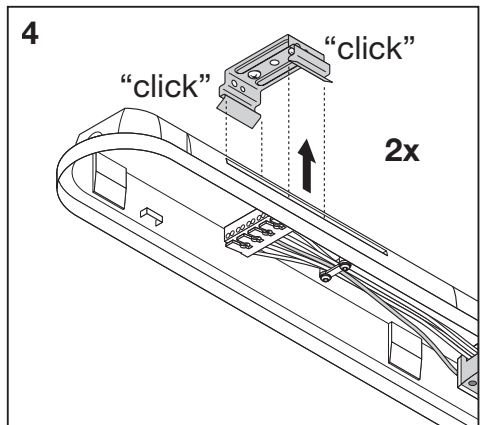
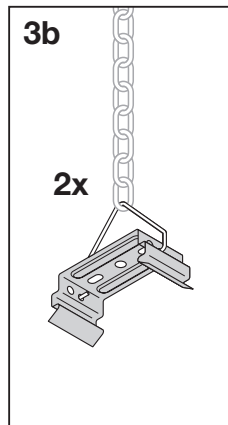
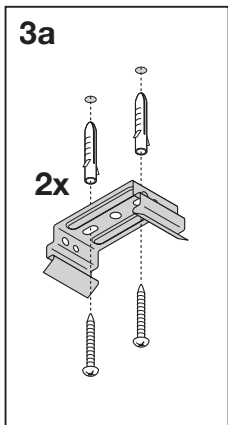
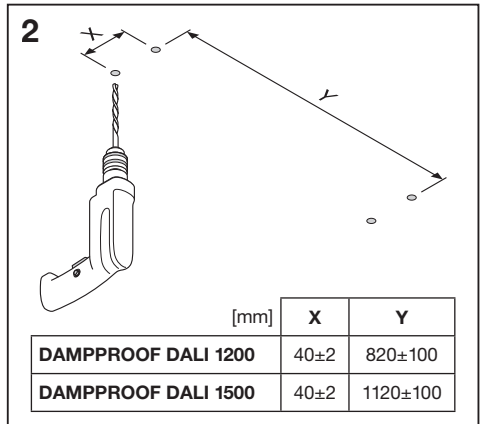
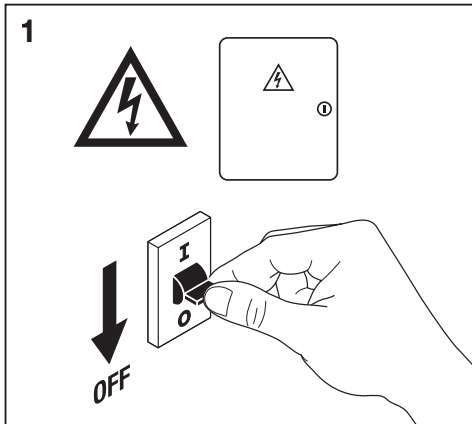








## DAMPPROOF DALI IP65






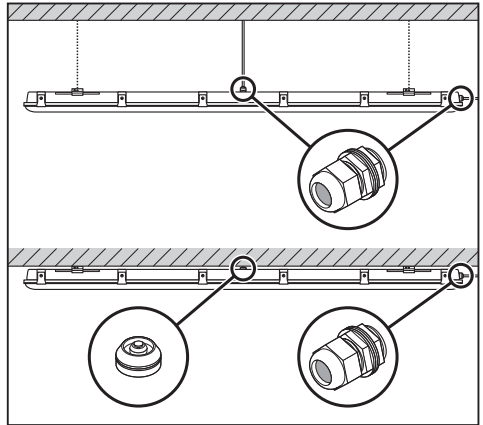


	EAN	l x w x h [mm]	W	W (230V DC)	lm	lm (230V DC)	lm/W	K
DAMPPROOF DALI 1200 21W/4000K IP65	4058075130913	1200x95x78	21	4.5	2400	470	115	4000
DAMPPROOF DALI 1200 39W/4000K IP65	4058075130937	1200x95x78	39	7.6	4400	890	115	4000
DAMPPROOF DALI 1200 39W/6500K IP65	4058075210141	1200x95x78	39	7.6	4400	890	115	6500
DAMPPROOF DALI 1500 30W/4000K IP65	4058075130975	1500x95x78	30	5.6	3500	670	115	4000
DAMPPROOF DALI 1500 55W/4000K IP65	4058075130999	1500x95x78	55	7.6	6400	860	115	4000
DAMPPROOF DALI 1500 55W/6500K IP65	4058075210165	1500x95x78	55	7.6	6400	860	115	6500

	EAN	IP	IK	Temp (°C)	V <sub>AC</sub>	Hz	Beam angle	PF	R <sub>a</sub>	Weight
DAMPPROOF DALI 1200 21W/4000K IP65	4058075130913	65	08	-25...+40	220-240V	0/50/60Hz	105°	> 0.9	> 80	1.8 kg
DAMPPROOF DALI 1200 39W/4000K IP65	4058075130937	65	08	-25...+40	220-240V	0/50/60Hz	105°	> 0.9	> 80	1.8 kg
DAMPPROOF DALI 1200 39W/6500K IP65	4058075210141	65	08	-25...+40	220-240V	0/50/60Hz	105°	> 0.9	> 80	1.8 kg
DAMPPROOF DALI 1500 30W/4000K IP65	4058075130975	65	08	-25...+40	220-240V	0/50/60Hz	105°	> 0.9	> 80	2.2 kg
DAMPPROOF DALI 1500 55W/4000K IP65	4058075130999	65	08	-25...+40	220-240V	0/50/60Hz	105°	> 0.9	> 80	2.2 kg
DAMPPROOF DALI 1500 55W/6500K IP65	4058075210165	65	08	-25...+40	220-240V	0/50/60Hz	105°	> 0.9	> 80	2.2 kg

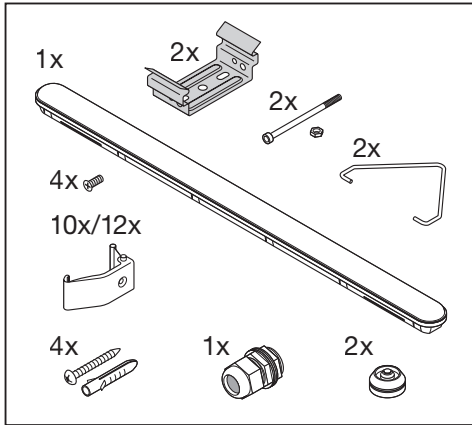

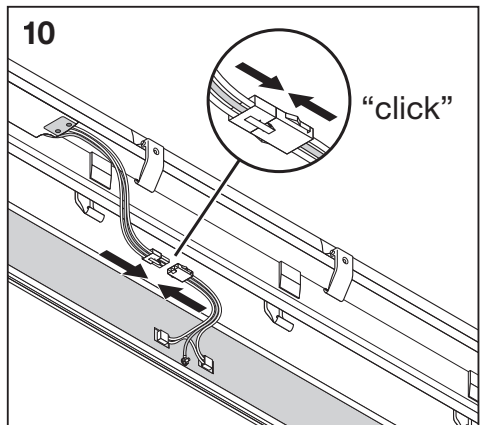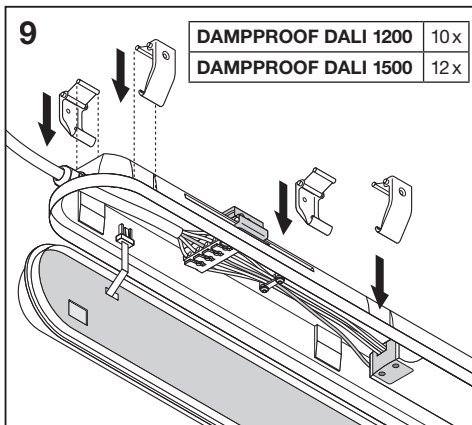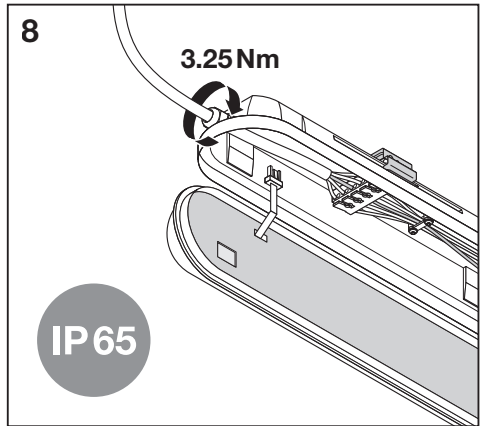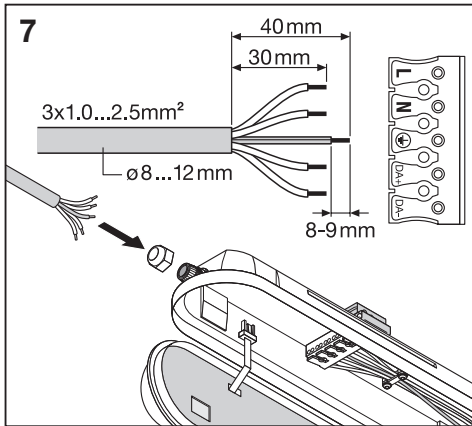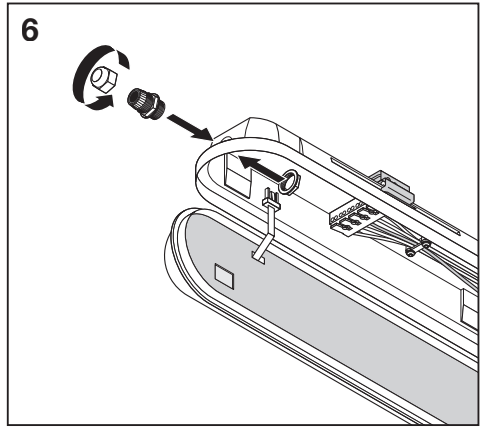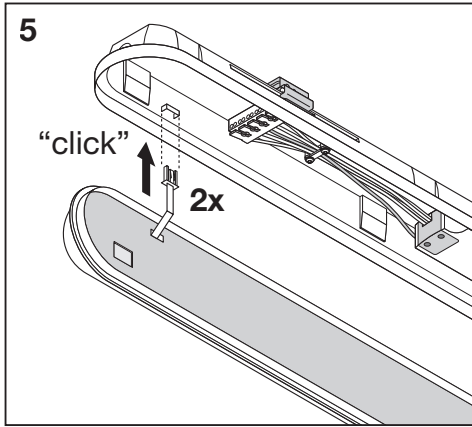

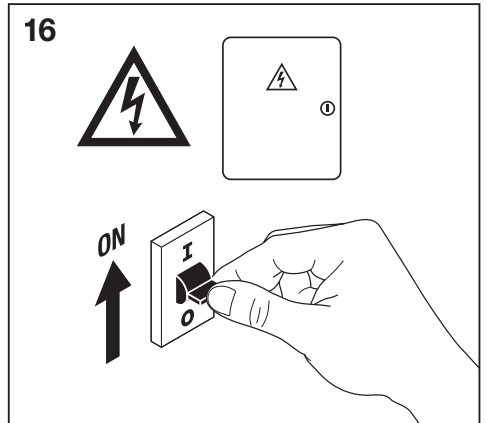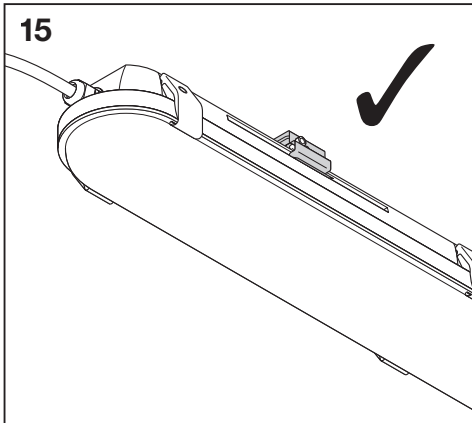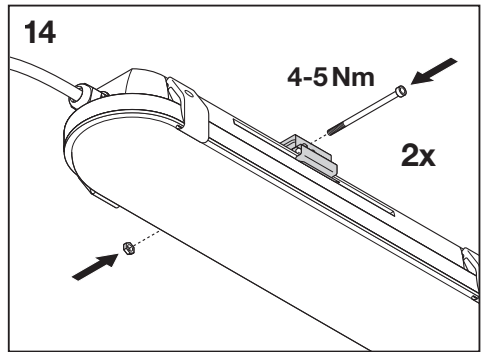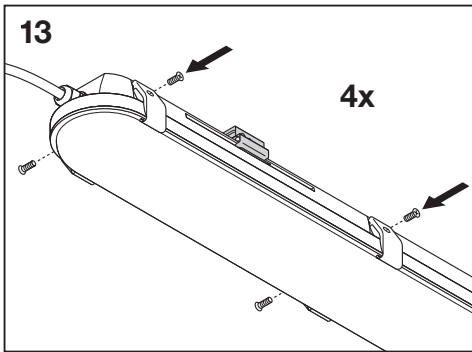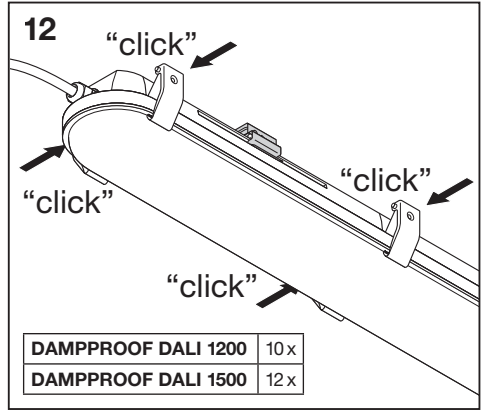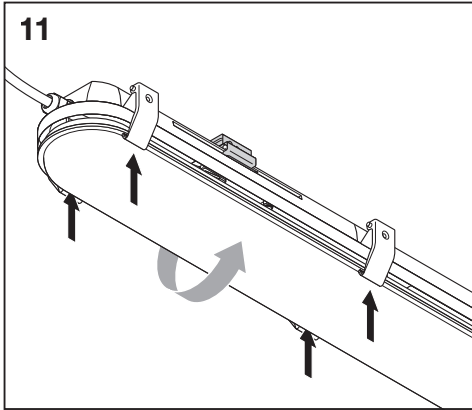

CE ENEC  RoHS  



C10449057  
G11054037  
04.09.18



LEDVANCE GmbH  
Steinerne Furt 62  
86167 Augsburg, Germany  
[www.ledvance.com](http://www.ledvance.com)