







SURFACE CIRCULAR

SURFACE CIRCULAR SENSOR


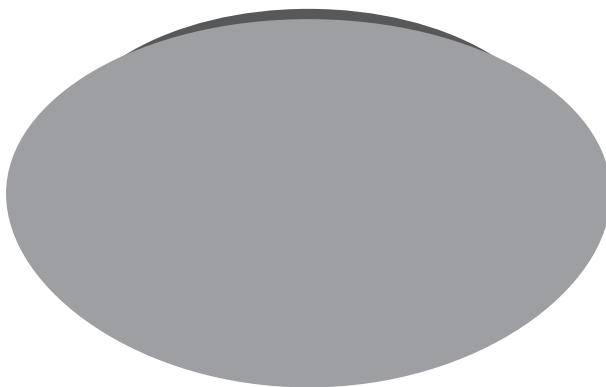


	EAN	Ø x h [mm]	W	lm	lm/W	K	IP	IK
SF CIRCULAR 250 13W/3000K	4058075110120	250 x 91	13	920	70	3000	44	03
SF CIRCULAR 250 13W/4000K	4058075110144	250 x 91	13	960	75	4000	44	03
SF CIRCULAR 250 13W/3000K S	4058075314894	250 x 91	13	920	70	3000	44	03
SF CIRCULAR 250 13W/4000K S	4058075314917	250 x 91	13	960	75	4000	44	03
SF CIRCULAR 350 18W/3000K	4058075080010	350 x 115	18	1440	80	3000	44	03
SF CIRCULAR 350 18W/4000K	4058075080034	350 x 115	18	1440	80	4000	44	03
SF CIRCULAR 350 18W/3000K S	4058075314931	350 x 115	18	1440	80	3000	44	03
SF CIRCULAR 350 18W/4000K S	4058075314955	350 x 115	18	1440	80	4000	44	03
SF CIRCULAR 400 24W/3000K	4058075080058	400 x 120	24	1920	80	3000	44	03
SF CIRCULAR 400 24W/4000K	4058075080072	400 x 120	24	1920	80	4000	44	03
SF CIRCULAR 400 24W/3000K S	4058075314979	400 x 120	24	1920	80	3000	44	03
SF CIRCULAR 400 24W/4000K S	4058075314993	400 x 120	24	1920	80	4000	44	03





	EAN	Δ _l (°C)	V _{AC}	Hz	◊	PF	R _a	👤
SF CIRCULAR 250 13W/3000K	4058075110120	-20...+40	220-240 V	50/60 Hz	120°	> 0.5	> 80	0.3 kg
SF CIRCULAR 250 13W/4000K	4058075110144	-20...+40	220-240 V	50/60 Hz	120°	> 0.5	> 80	0.3 kg
SF CIRCULAR 250 13W/3000K S	4058075314894	-20...+40	220-240 V	50/60 Hz	120°	> 0.5	> 80	0.3 kg
SF CIRCULAR 250 13W/4000K S	4058075314917	-20...+40	220-240 V	50/60 Hz	120°	> 0.5	> 80	0.3 kg
SF CIRCULAR 350 18W/3000K	4058075080010	-20...+40	220-240 V	50/60 Hz	120°	> 0.5	> 80	0.6 kg
SF CIRCULAR 350 18W/4000K	4058075080034	-20...+40	220-240 V	50/60 Hz	120°	> 0.5	> 80	0.6 kg
SF CIRCULAR 350 18W/3000K S	4058075314931	-20...+40	220-240 V	50/60 Hz	120°	> 0.5	> 80	0.7 kg
SF CIRCULAR 350 18W/4000K S	4058075314955	-20...+40	220-240 V	50/60 Hz	120°	> 0.5	> 80	0.7 kg
SF CIRCULAR 400 24W/3000K	4058075080058	-20...+40	220-240 V	50/60 Hz	120°	> 0.5	> 80	0.7 kg
SF CIRCULAR 400 24W/4000K	4058075080072	-20...+40	220-240 V	50/60 Hz	120°	> 0.5	> 80	0.7 kg
SF CIRCULAR 400 24W/3000K S	4058075314979	-20...+40	220-240 V	50/60 Hz	120°	> 0.5	> 80	0.8 kg
SF CIRCULAR 400 24W/4000K S	4058075314993	-20...+40	220-240 V	50/60 Hz	120°	> 0.5	> 80	0.8 kg

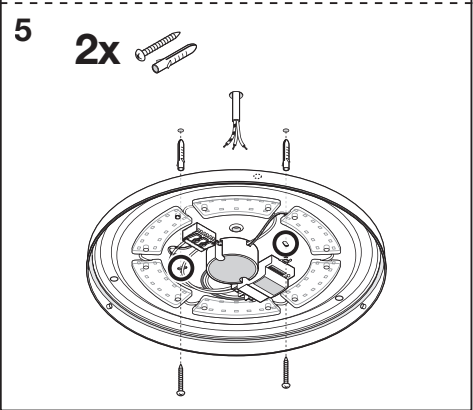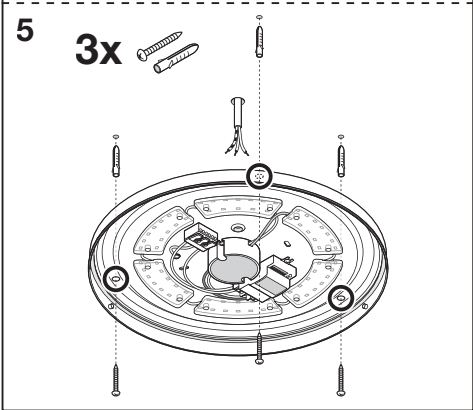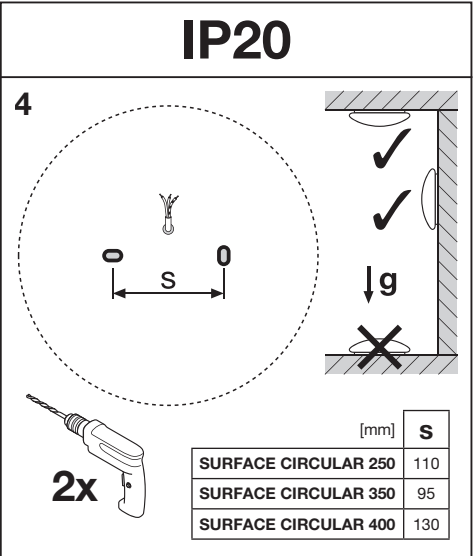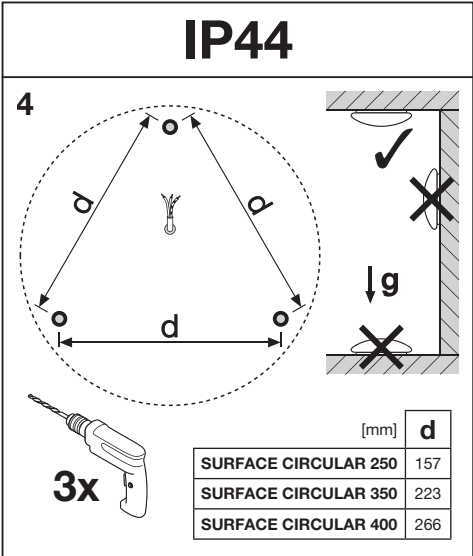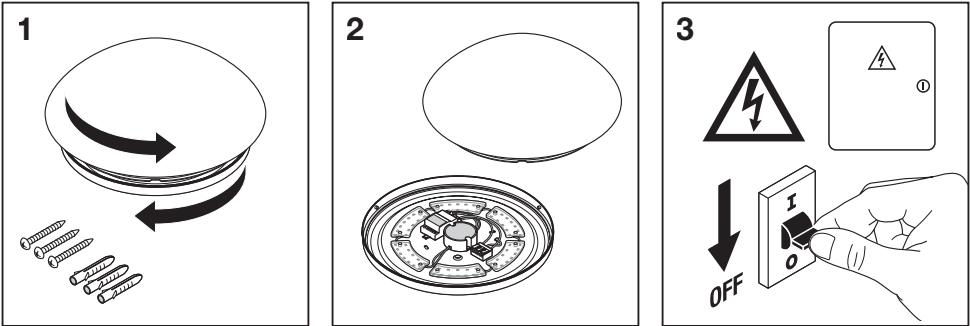

6

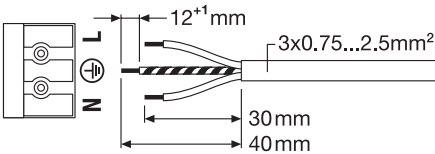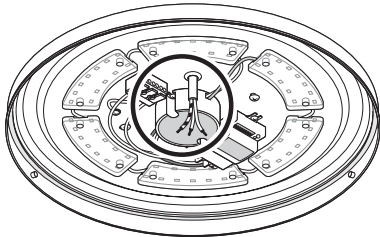

7: SURFACE CIRCULAR SENSOR

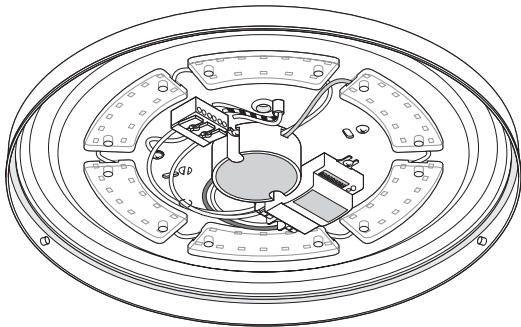

Detection Area

1	2	3	
ON	ON	ON	100 %
-	ON	ON	75 %
ON	-	ON	50 %
-	-	ON	25 %
-	-	-	10 %







Hold Time

4	5	6	
ON	ON	ON	5 s
-	ON	ON	30 s
ON	-	ON	90 s
-	-	ON	3 min
ON	ON	-	20 min
-	-	-	30 min



Daylight Sensor

7	8	9	
ON	ON	ON	2 LUX
ON	ON	-	10 LUX
-	ON	-	25 LUX
ON	-	-	50 LUX
-	-	-	Disable

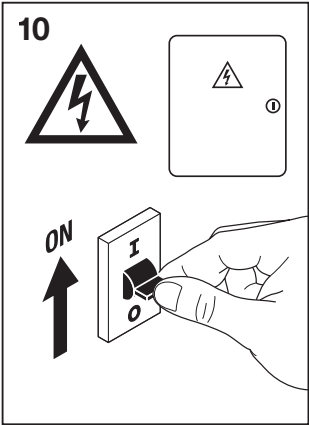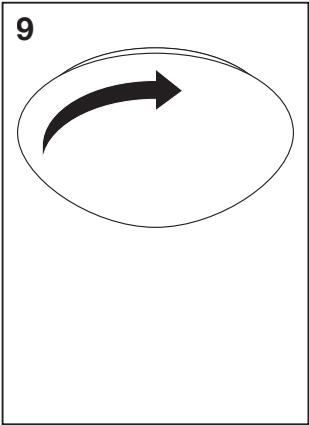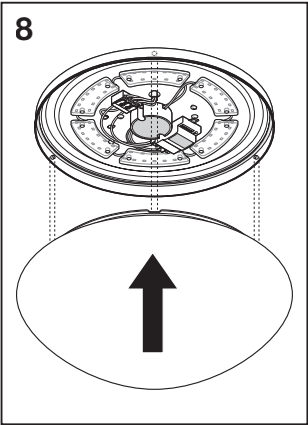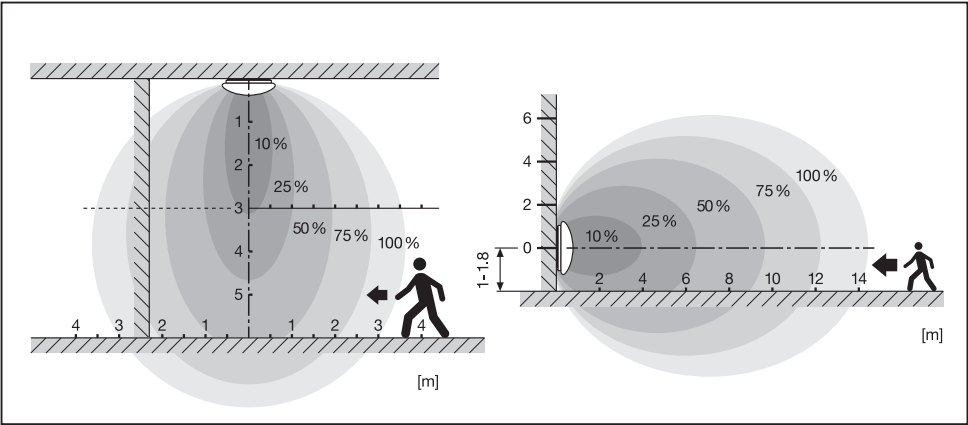

	EAN	Ø x h [mm]
SF CIRCULAR 250 COVER	4058075156722	250x80
SF CIRCULAR 350 COVER	4058075156807	350x104
SF CIRCULAR 400 COVER	4058075156821	400x112

CE   RoHS



C10449057
G11072557
12.04.19

 LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com