

MULTIVERT® 1250A

Size 4a, 690VAC

IEC FUSE SWITCH DISCONNECTORS

NH VERTICAL FUSE SWITCH DISCONNECTOR



MULTIVERT® NH vertical fuse switch disconnectors meet all functions of NH fuse switch disconnectors. They are designed for installation on to bus bars in triple pole arrangements.

MULTIVERT® 1250A are for installation on to 185 mm bus bar systems.

MULTIVERT® 1250A are designed for NH fuse-links in accordance with IEC/EN 60269-2, VDE 0636-2, size 4a: 1250A.

MULTIVERT® offer the user the possibility of fast and easy installation as well as a high degree of protection during installation and maintenance.

TECHNICAL DATA OVERVIEW

Voltage AC	690 VAC
Amper (A)	1250 A
Size per Standard	4a
SCCR	Ue = AC 690 V; Ie = 1250 A 50kA
Mounting	bus bar system 185 mm
Switchability	3 x single pole
Number of Poles	3

FEATURES & BENEFITS

- Installation on to 185mm bus bar system
- Top or bottom cable terminal connection
- Safe on load connection/disconnection in accordance with IEC 60947-3

APPLICATIONS

- Transformer substations
- Switch boards for industrial applications
- Residential and industrial distribution units
- Cable distribution cabinets

STANDARDS

- IEC/EN 60 947-3
For NH-fuse links size 4a in accordance with in accordance with IEC/EN 60 269-2, VDE 0636-2



MULTIVERT® 1250A

Size 4a, 690VAC

PRODUCT RANGE



1.000.093 1.000.094

MULTIVERT® 1250 A size 4a 3 x single pole switching

Catalog number	Reference number	Cable termination components	Design	Weight kg ¹	Package
1.000.093	A1023270	M16 screw terminal	bottom terminal	16.40	1 piece
1.000.094	B1023271	M16 screw terminal	top terminal	16.40	1 piece

¹weight in kg per piece or set including package

TECHNICAL DATA IN ACCORDANCE WITH EN / IEC 60947

	1250 A 3 x single pole switching
Number of poles/phases	3
Size	4a
Conventional free air thermal current with NH-fuse links I_{th}	1250 A
Max. power dissipation of fuse links P_n	110 W
Conventional free air thermal current with solid links I_{th}	1250 A
Max. power dissipation of solid links P_n	42 W
Utilization category to IEC/EN 60947-3 $U_e = AC 500 V; I_e = 1250 A$	AC 22 B
Rated operational voltage U_e	690 V
Rated insulation voltage U_i	1000 V
Rated impulse withstand voltage $U_{_{imp}}$	8 kV
Rated frequency	50 ... 60 Hz
Degree of protection	IP 20
Degree of pollution	3
Rated duty	uninterrupted duty
Rated conditional short-circuit current with fuse links $U_e = AC 690 V; I_e = 1250 A$	50 kA
Rated short circuit making capacity with solid links I_{cm}	68 kAsw
Rated short-time withstand current I_{cw}	32 kA / 1 s
Power dissipation by I_{th} without NH-fuse links	336 W
Power dissipation by I_{th} 1000 A without solid links	336 W
Installation mode	bus bar installation
Cable terminal connection	
Standard cable terminal	M16
for copper bars with max. dimensions	80 x 10 mm


MERSEN reserves the right to change, update or correct, without notice, any information contained in this datasheet.

MULTIVERT® 1250A

Size 4a, 690VAC

DIMENSIONS


MULTIVERT® NH-vertical fuse switch disconnecter 1250A (M02004)

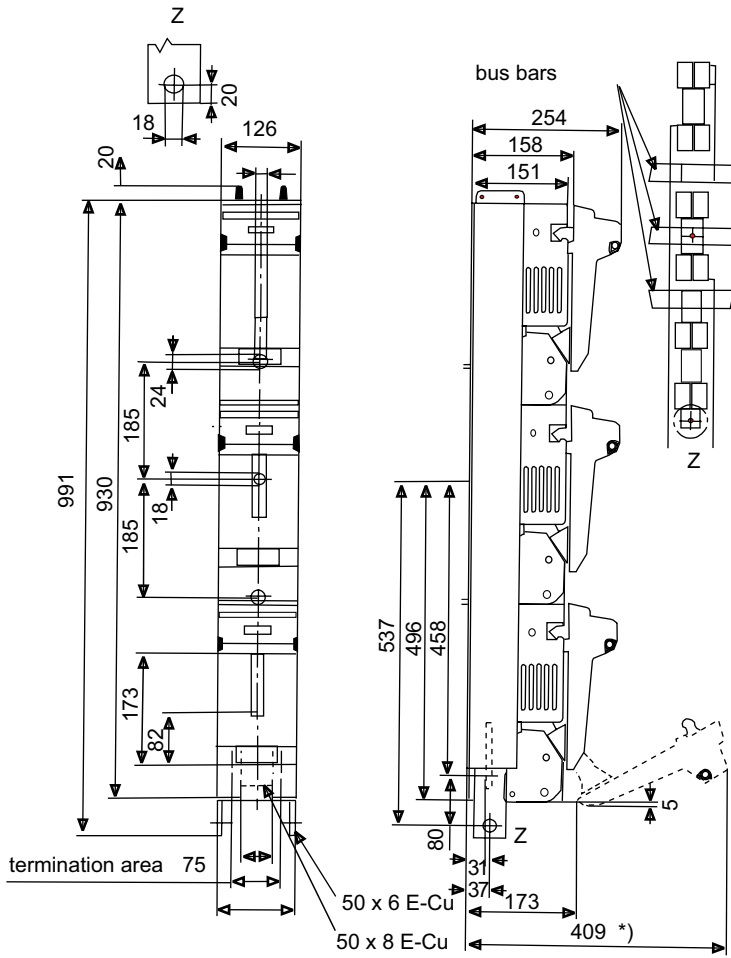

*) to remove switch door cover 425 mm are required

Dimensions in mm

Cable termination MULTIVERT® 1250A (M02040_1250)



Dimensions in mm

MERSEN reserves the right to change, update or correct, without notice, any information contained in this datasheet.