


MP-120/05-1

Insulating mat class 4 - width 1 m.

Series: MP-... 4_100

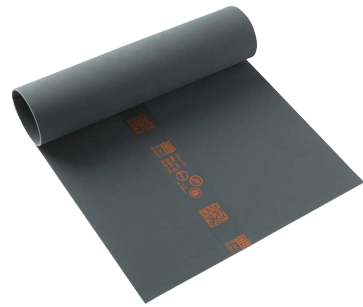

Application :

- Insulating mat for live and dead work. Maximum operating voltage: 36 000 V AC - 54 000 V DC.
- Used to cover the floor for the electrical protection of operators in electrical installations.
- Protect the workers from the ground potential.
- Must be adapted to the nominal voltage of the network supplying the installation on which it is used.

Features :

- In accordance with IEC 61111: 2009 standard and to specific properties of the "C" Category (extremely low temperature folding test at - 40 °C).
- RoHS2 compliant. REACH compliant (SVHC free).
- Material : elastomere without halogen.
- Unit test in production.
- D bar code (Datamatrix) on marking with direct link to user guide and technical sheet.
- Storage temperature: +10°C to +21°C.
- Operating temperature: -40°C to +55°C.

Dimensions

Thickness 5
Width 1 000

Fonctionnalité

Weight 10,5

Longueur

Length 1 200

Protection Class 4

Tension

Operating Voltage AC 36 000 V

Operating Voltage DC 54 000 V

Température

Storage Temperature + 10°C/+ 21° C.

Operating Temperature - 40°C/+ 55°