




Date de la dernière modification
09/11/2023

MP-60/03-10

Insulating mat class 3 - width 0.6 m.

Series: MP-... 3_060

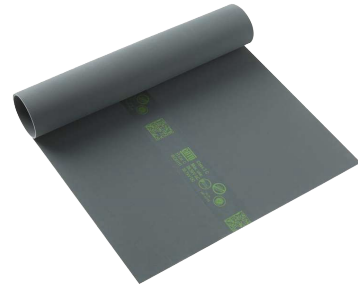

Application :

- Insulating mat for live and dead work. Maximum operating voltage: 26 500 V AC - 39 750 V DC.
- Used to cover the floor for the electrical protection of operators in electrical installations.
- Protect the workers from the ground potential.
- Must be adapted to the nominal voltage of the network supplying the installation on which it is used.

Dimensions

Thickness 32
Width 600

Fonctionnalité

Weight 28

Longueur

Length 10 000

Protection Class 3

Tension

Operating Voltage AC 26 500 V
Operating Voltage DC 39 750 V

Features :

- In accordance with IEC 61111: 2009 standard and to specific properties of the "C" Category (extremely low temperature folding test at - 40 °C).
- RoHS2 compliant. REACH compliant (SVHC free).
- Material : elastomere without halogen.
- Unit test in production.
- D bar code (Datamatrix) on marking with direct link to user guide and technical sheet.
- Storage temperature: +10°C to +21°C.
- Operating temperature: -40°C to +55°C.