




**Date de la dernière modification**  
09/11/2023

## MP-100/03-10

Insulating mat Class 3 - 1 x 10 m

Series: MP-... 3\_100

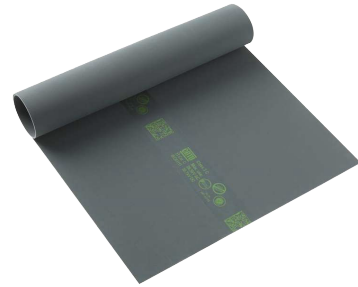

### Application :

- Insulating mat for live and dead work. Maximum operating voltage: 26 500 V AC - 39 750 V DC.
- Used to cover the floor for the electrical protection of operators in electrical installations.
- Protect the workers from the ground potential.
- Must be adapted to the nominal voltage of the network supplying the installation on which it is used.

### Dimensions

Thickness	3,2
Width	1 000
<b>Fonctionnalité</b>	
Weight	45
<b>Longueur</b>	
Length	10 000
Protection Class	3
<b>Tension</b>	
Operating Voltage AC	26 500 V
Operating Voltage DC	39 750 V

### Features :

- In accordance with IEC 61111:2009 standard and to specific properties of the "C" Category (extremely low temperature folding test at - 40 °C).
- RoHS2 compliant. REACH compliant (SVHC free).
- Material: elastomere without halogen.
- Unit test in production.
- D bar code (Datamatrix) on marking with direct link to user guide and technical sheet.
- Storage temperature: +10°C to +21°C.
- Operating temperature: -40°C to +55°C.