


Date de la dernière modification  
09/11/2023

## M-24-35

Vinyl sheathed copper cable for MALT/CC

Series: M-24-...

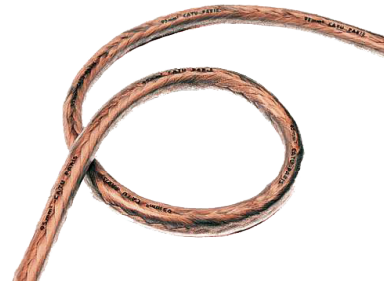

### Application :

- Earthing and short-circuiting cables.

### Features :

- Material : Copper with insulating sheath in extra flexible PVC ST11 grade.
- Transparent insulating sheath.
- Minimum bending radius: 4 times the cable diameter.
- Operating temperatures: -40°C to +60°C.
- Standard marking every 500 mm.
- Delivered by 5 m min.

### Diamètre

Diameter

11.7

### Fonctionnalité

Weight

0,38 /m

Material

Cuivre

Short Circuit Rating

10