


Date de la dernière modification
09/11/2023

M-24-150

Vinyl sheathed copper cable for MALT/CC

Series: M-24-...

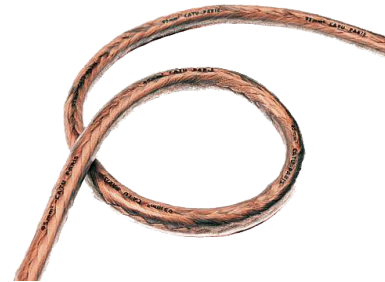

Application :

- Earthing and short-circuiting cables.

Features :

- Material : Copper with insulating sheath in extra flexible PVC ST11 grade.
- Transparent insulating sheath.
- Minimum bending radius: 4 times the cable diameter.
- Operating temperatures: -40°C to +60°C.
- Standard marking every 500 mm.
- Delivered by 5 m min.

Diamètre

Diameter

22.5

Fonctionnalité

Weight

1,54 /m

Material

Cuivre

Short Circuit Rating

42.5