

TFTT-16/17

Connector heads for earthing rod.

Series: TFT.-16/17..

Network Application: LV

////////////////////////////////////

Application:

- Head/rod connection obtained by conical press-fitting with force.
- Head/cable connection made by striking a stainless steel peg located in the upper part of the head. This strike guarantees the connection head/posts and head/cable.
- For earthing rods: Ø 17.3 mm copper-steel and Ø 16 mm stainless-steel.
- Model TFTI-16/17: the head/rod connection fits inside the earthing rod.

Description

Use

Connector

Fitting

Mounting

Use


Diamètre

Diameter

Fonctionnalité

Weight

Material

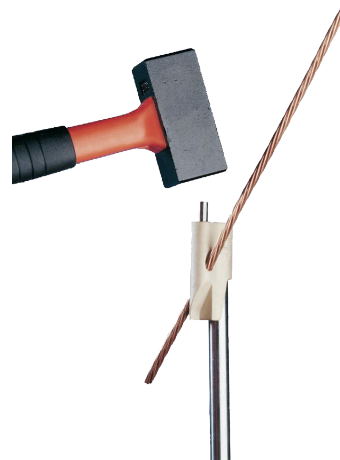

Tangential running through copper cable 25-29 mm²

Câblette cuivre passante tangentiellement 25 ou 29 mm²

Piquet cuivre acier D. 17,3 mm et acier inox D. 16 mm

Piquet cuivre acier D. 17,3 mm et acier inox D. 16 mm
Tangential running through copper cable 25-29 mm²

25

0,22

Bronze