


Date de la dernière modification  
09/11/2023

## M-24-25-S

Silicon sheathed copper cable for MALT/CC

Series: M-24-...-S

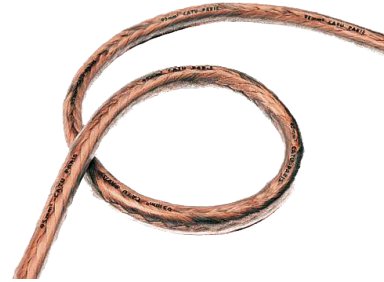

### Application :

- Earthing and short-circuiting cables.

### Features :

- Conform to IEC 61230.
- Material: multi-stranded copper with extra flexible silicone insulation.
- Operating temperatures: -40°C to +60°C.
- Standard marking every 500 mm.
- Delivered by 5 m min.

### Diamètre

Diameter

7.5

### Fonctionnalité

Weight

0,28 /m

Material

Cuivre

Short Circuit Rating

6