



Mosaic™

**Sockets for installation on DLP trunking with direct connection
 Franco-Belgian standard**


Cat. No(s): **0 771 01/02/03/04/82/83/92**
0 771 21/22/23/24



0 771 01



0 771 02

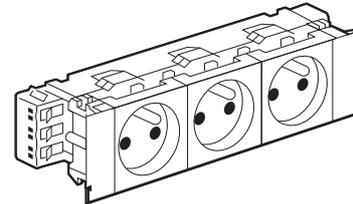

0 771 03

1. DESCRIPTION

Sockets with connection at both sides for snap-on mounting on trunking. These sockets incorporate the Soluclip accessory to hold the socket in place and comply with standard EN 50085-2-1 (the IP 40 rating should not be affected by the cut-out in the cover).

2. RANGE


2 P+E socket outlets - 2 modules



- White
- Red tamperproof

0 771 01
 0 771 21


2 x 2 P+E socket outlets - 4 modules



- White
- Red tamperproof
- Black
- Green for identification circuit

0 771 02
 0 771 22
 0 771 82
 0 771 92


3 x 2 P+ E socket outlets - 6 modules



- White
- Red with tamperproof
- Black

0 771 03
 0 771 23
 0 771 83


4 x 2 P+ E socket outlets - 8 modules



- White
- Red with tamperproof

0 771 04
 0 771 24

3. OVERALL DIMENSIONS (mm)

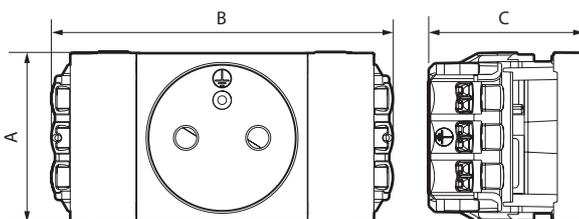

3. OVERALL DIMENSIONS (mm) (continued)

Catalogue numbers	A	B	C
0 771 01/21	46	90	41
0 771 02/22/82/92	46	135	41
0 771 03/23/83	46	180	41
0 771 04/24	46	225	41

4. CONNECTION

Type of terminals: automatic
 Number of terminals: 6
 Terminal capacity: 2 x 2.5 mm²
 Stripping length: 10 mm
Note: Marking of phase (right spindle) by a white point.

5. TECHNICAL CHARACTERISTICS

5.1 Mechanical characteristics

Impact tests: IK 04
 Protection against solid bodies and liquids: IP 40

5.2 Material characteristics

Base: ABS
 Cover plate: PC
 Halogen free
 UV resistant
 Self-extinguishing:
 + 850° C / 30 s for insulating parts holding live parts in place
 + 650° C / 30 s for other parts made of insulating materials.

5.3 Electrical characteristics

Voltage: 250 V~
 Current: 16 A

5.4 Climatic characteristics

Storage and use temperature: - 15° C to + 70° C

Sockets for installation on DLP trunking with direct connection Franco-Belgian standard

6. MAINTENANCE

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. ACCESSORIES

Tamperproof insert

	● Red Fixes directly onto the 2P+E plug of the appliance to be connected to the tamperproof socket.	0 502 99
---	--	----------

Cable end fitting

	Prevents tension on the connection between the wire and socket if the cable is pulled.	0 898 07
---	--	----------


Quick tap-off accessory

	For quick, simple tap-off between 2 socket blocks for trunking. Fitted with a white cover.	0 771 06
---	---	----------

■ Operating principle for the tap-off accessory



Simple, intuitive tap-off from 2 socket blocks.
The tap-off accessory also acts as a finishing piece for the 2 socket blocks.

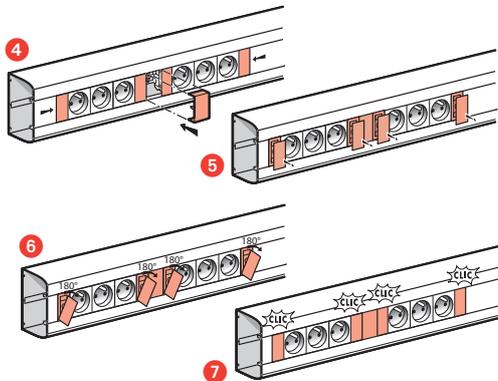

8. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer to e. catalogue.