

1. GENERAL CHARACTERISTICS


Plug-in connector for T-shaped ACO telephone socket
Used to connect a telephone set equipped with a T plug
Supplied complete with special cover plate for Mosaic only

2. MOUNTING

Mosaic only
Remove the cover plate from 742 40, insert the T-shaped plug-in connector, then clip the new cover plate flat
Then takes all ACO modules as replacements
Mounting possible on 45 x 45 AMPACO box

3. TECHNICAL CHARACTERISTICS

Printed circuit mounted on thermoplastic support
Tool-free wiring through insulation displacement
Operating temperature: - 5° to + 40° C

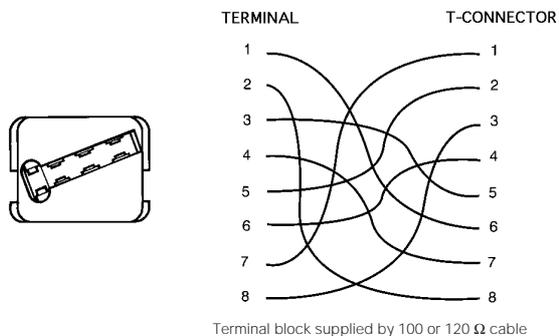


Cover plate

Polycarbonate RAL 9010
Self-extinguishing; 750° C / 5 sec.
Resistance to fire V0 according to UL 94
Marking possible

(1) AMP licence compatible with AMPACO

4. DIMENSIONS

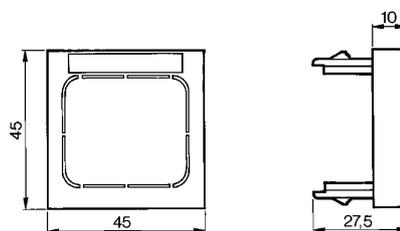

5. STANDARDS AND APPROVALS

Compatible with France Telecom Corel