





# CrystalWay


24-48 V DC / 220 V DC & AC 45 / 45 XL




Luminaire pour source centrale (LSC) / CBS luminaire

AEAS  
www.marque-nf.com

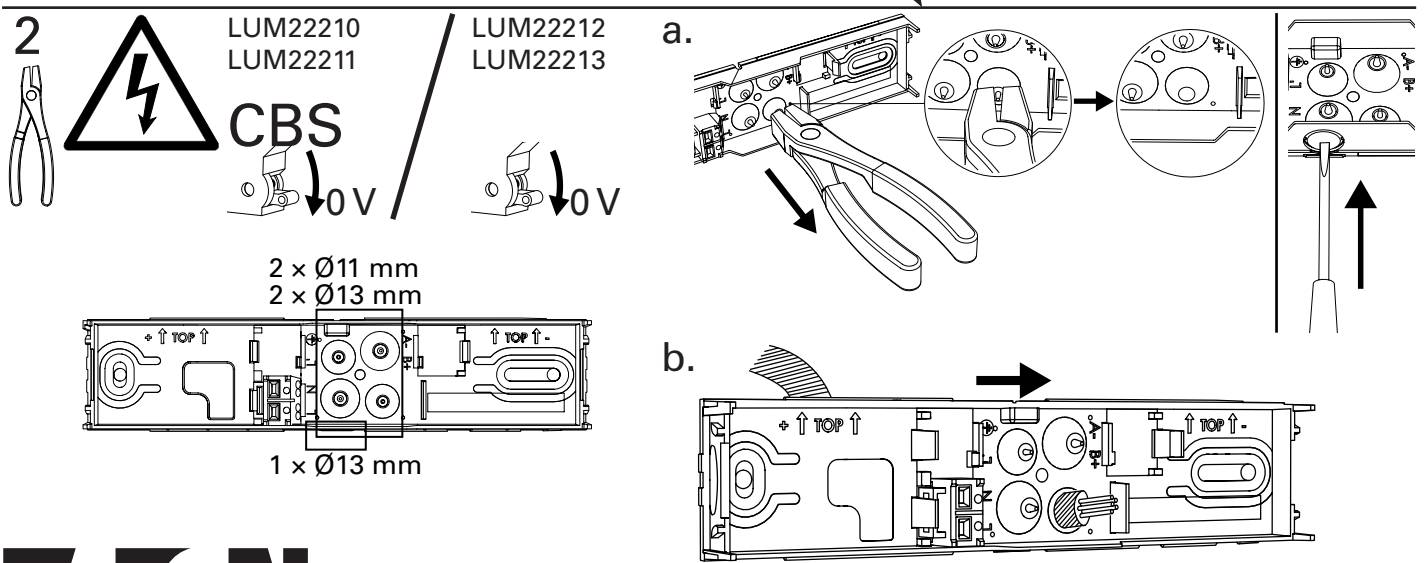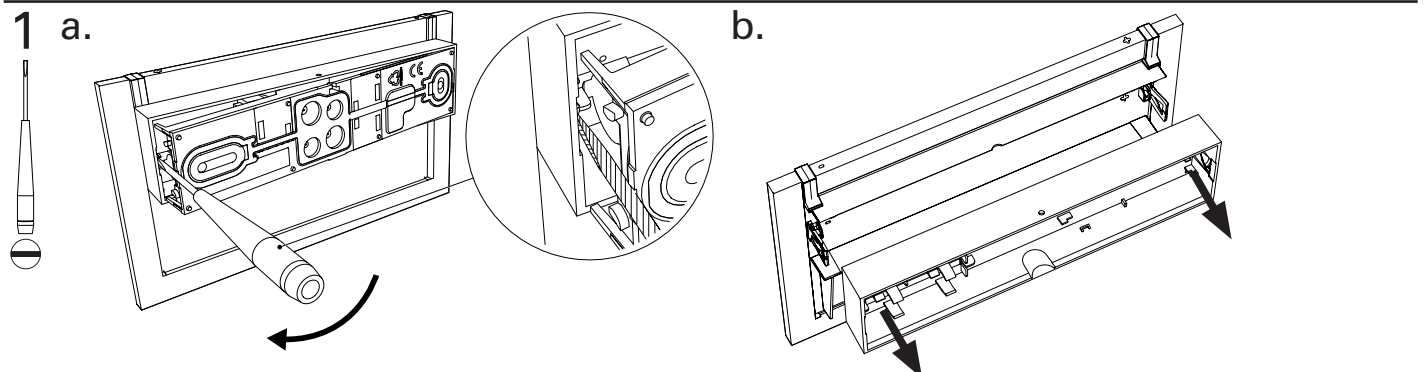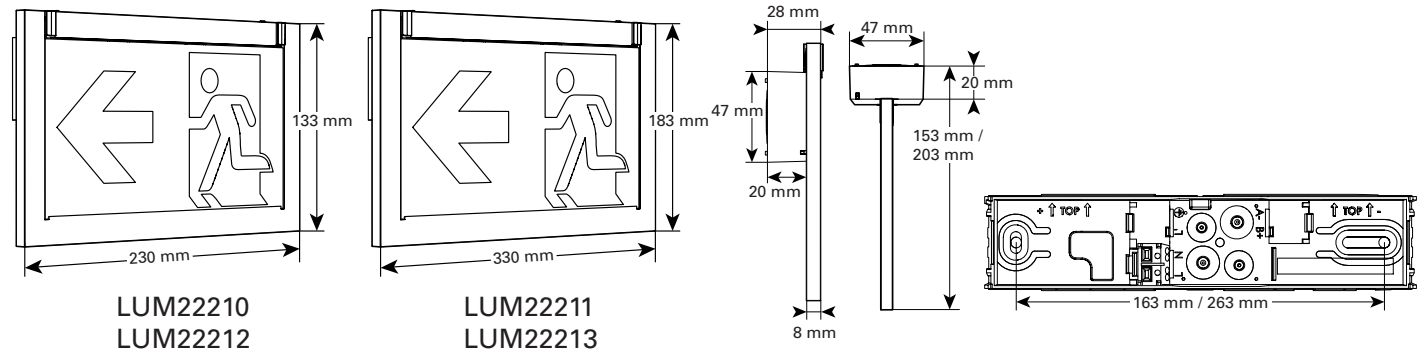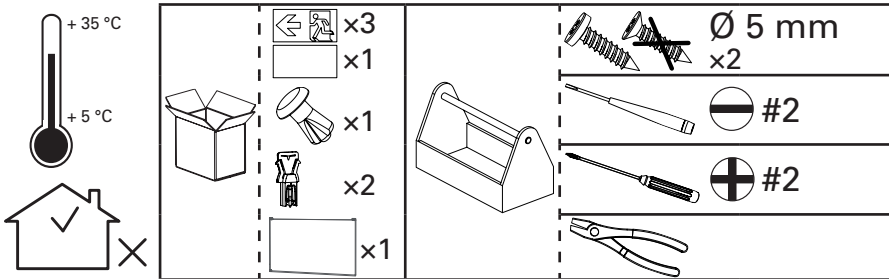

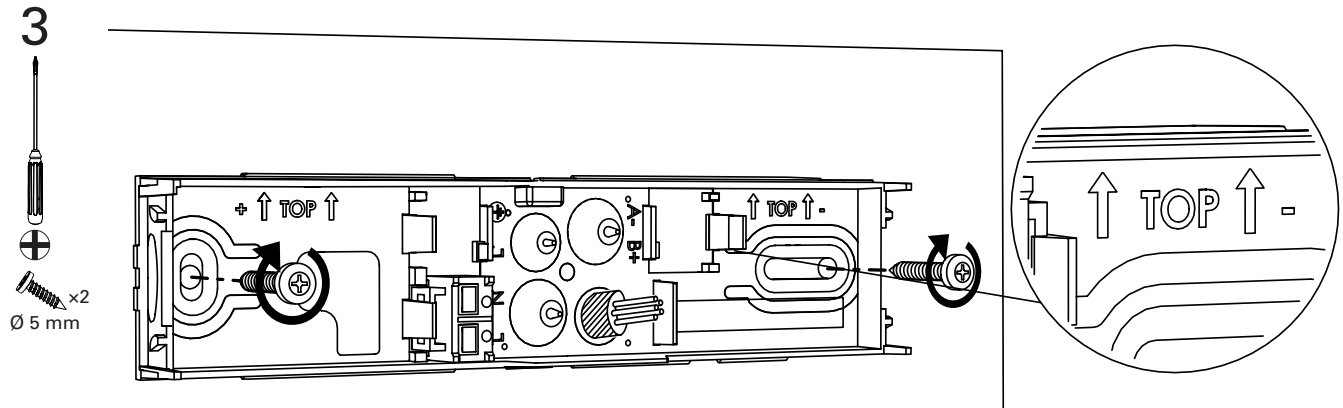


**4 a.**

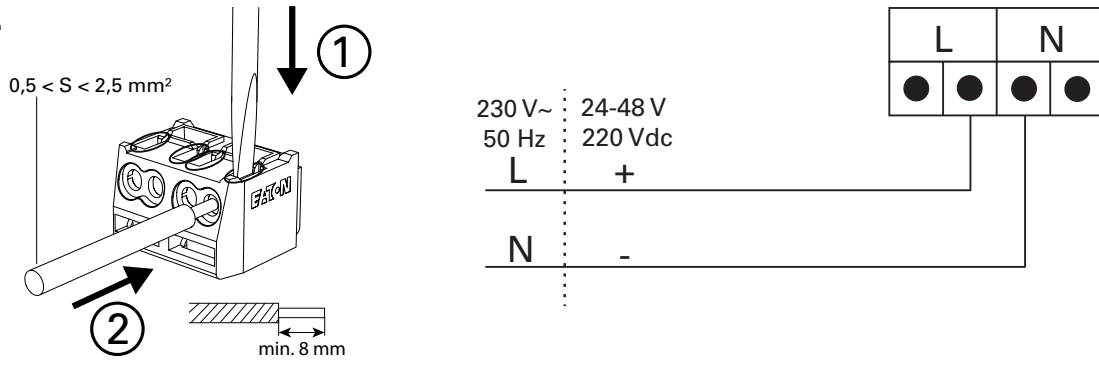


Câble souple ou rigide /  
Flexible or rigid wire

**b.**

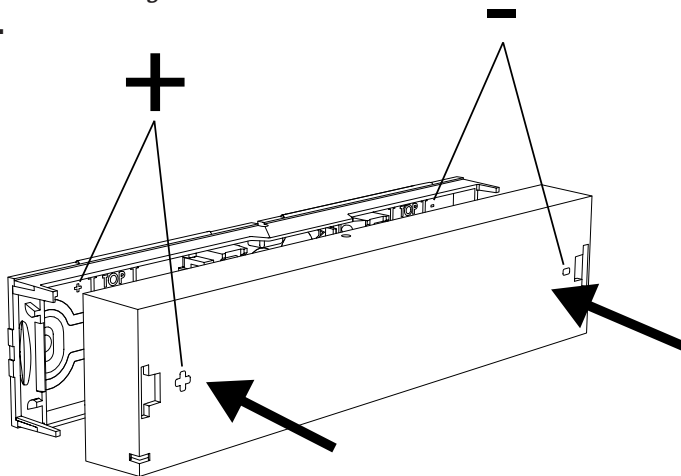


5





Montage Mural/Wall-mounting


(Montage Plafond/Ceiling-mounting : voir page suivante/see next page)




a.

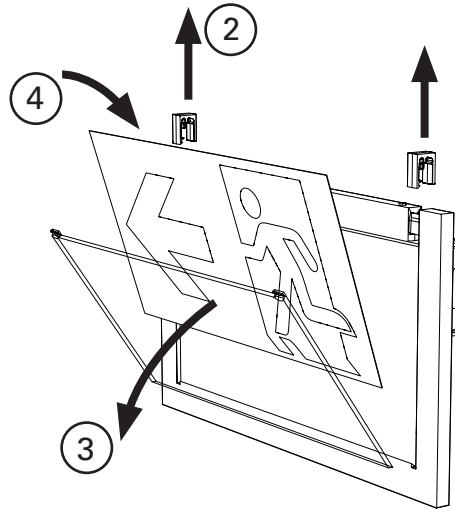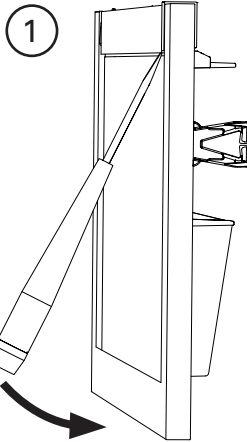


b.

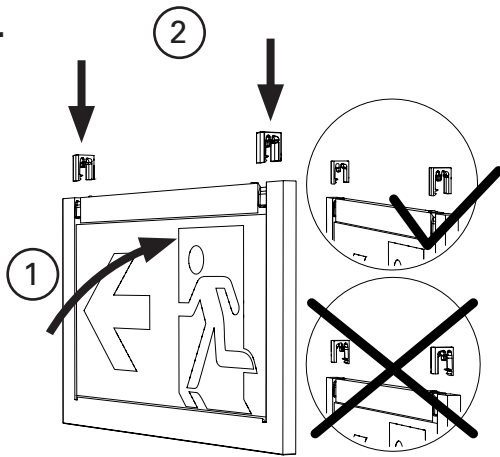

c.

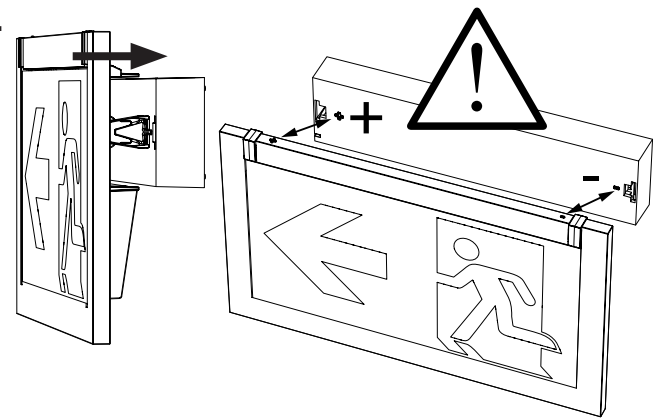

d.

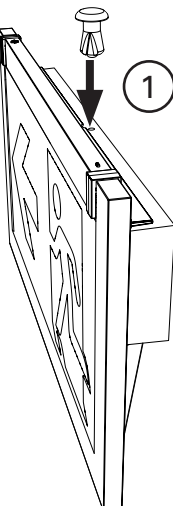

LUM22210  
LUM22211










LUM22212  
LUM22213






# 5

## Montage Plafond/Ceiling-mounting

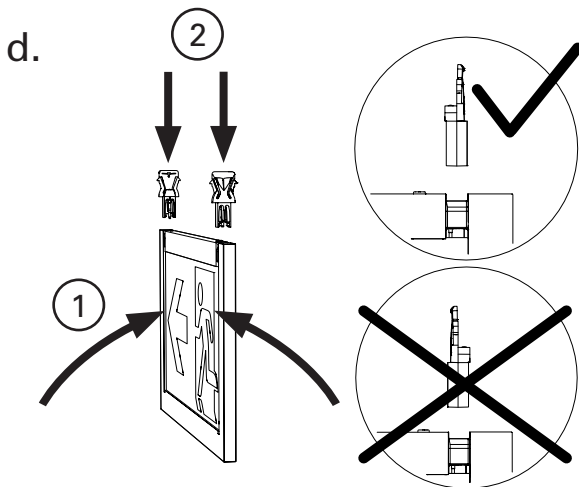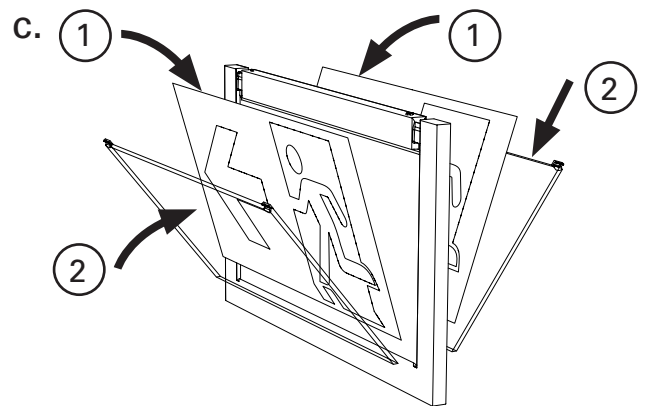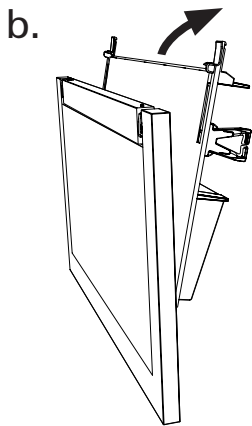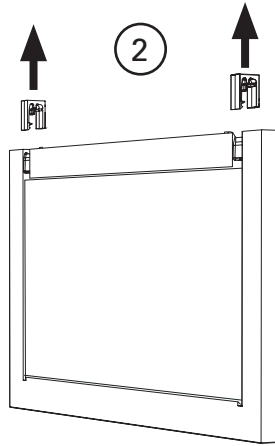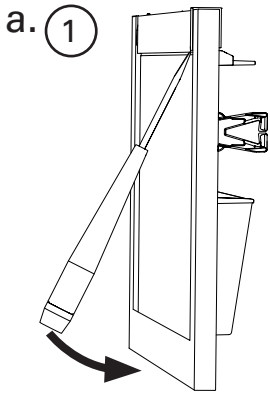

# 5

## Montage Plafond/Ceiling-mounting

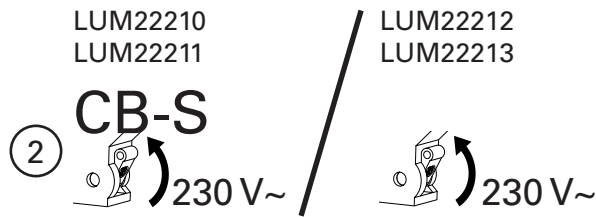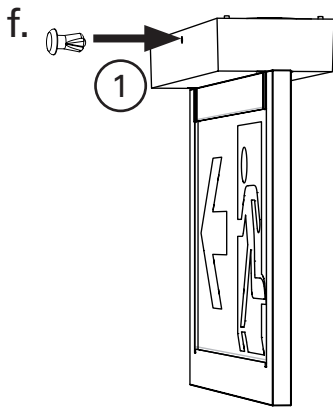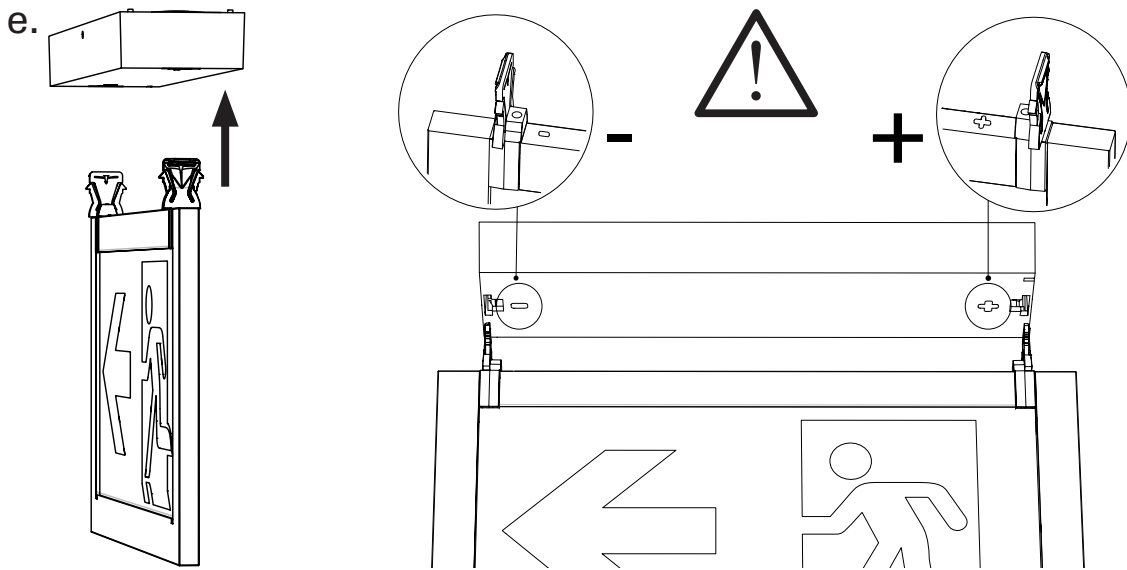

			NF			EN	FR
CrystalWay 24-48/45	LUM22210	15056		60 lm / 24 × LED 2,9 V 300 mA	24-48 V=	EN 60598.1	C 71802
CrystalWay 24-48/45 XL	LUM22211	15057		60 lm / 38 × LED 2,9 V 600 mA	1,85 W	EN 60598.2.22 EN 1838/ISO0061	
			IP 42 / IK 04				
CrystalWay 220/45	LUM22212	15058		60 lm / 24 × LED 2,9 V 300 mA	230 Vac 50 Hz/220 Vdc	EN 60598.1	C 71802
CrystalWay 220/45 XL	LUM22213	15059		60 lm / 38 × LED 2,9 V 600 mA	1,8 W - 4,5 VA	EN 60598.2.22 EN 1838/ISO0061	
			IP 42 / IK 04				