


Micromodule for 2-speed exhaust fan

Cat. No(s): 0 677 66

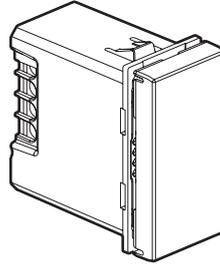


1. USE

2-speed exhaust fan micromodule.
 To be installed inside an IP4X box.
 Can be associated with one or more wireless controls for VMC.

2. RANGE

Description	Cat. No
Micromodule for 2-speed VMC With LED indicator (configuration) and RESET button (hidden) used to return to factory settings.	0 677 66

3. DIMENSIONS (mm)

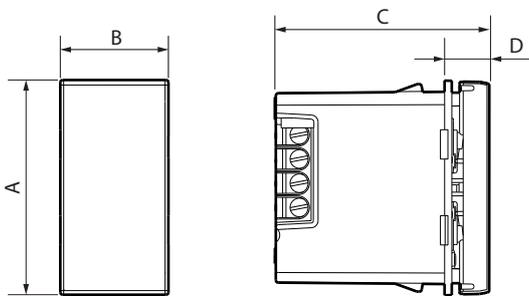


A	B	C	D
45	22.5	45	9

4. CONNECTION

Type of terminals: with screws
 Terminals capacity: 1 x 2.5 mm² - 2 x 1.5 mm²
 Stripping length: 7 mm
 Screwdriver: flat blade 3 mm

5. FUNCTION



RESET button
 used to return to factory mode.

6. TECHNICAL CHARACTERISTICS

■ 6.1 Mechanical characteristics

Protection against impacts: IK 04
 Protection against solid/bodies and liquids: IP 20

■ 6.2 Material characteristics

Mechanism casing: PC
 Cover-plate : ABS White RAL 9003
 Self-extinguishing:
 850°C/30 s for insulating parts holding live parts in place.
 650°C/30 s for the other insulating components.

■ 6.3 Electrical characteristics

Frequency band: 2.4 to 2.44835 GHz
 Power level: < 100 mW

	Motor
240 Vac max.	1 x 500 VA
100 Vac max.	1 x 270 VA

Voltage: 100/240 V~
 Frequency: 50/60 Hz

■ 6.4 Climate characteristics

Storage temperature: 0°C to +45°C
 Usage temperature: +5°C to +45°C

7. CARE

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

8. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (0 677 66) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrandoc.com

Compliant with installation and manufacturing standards.
See e.catalogue.